


- TRAY IS SYMMETRICAL AND MAY BE MOUNTED AS A SHELF OR TRAY AS SHOWN ON SHEET 2 OF 2. TO CONVERT, SIMPLY DISCONNECT, FLIP OVER AND RE-INSTALL
- TRAY KIT INCLUDES:
  - 1 EA. SLIDES ASSY AND TRAY RIVETED
  - 1 EA. HARDWARE KIT:
    - 12 EA. CLIP NUTS #10-32
    - 10 EA. SCREWS PHPH #10-32 X 1/2" SS
- SLIDE LOCKS IN FULL OPEN POSITION AND IS PROVIDED WITH QUICK DISCONNECT OF CHASSIS SECTION.
- SLIDE BALL RETAINER: C1010 CRS. BRIDGED FOR TRU-TRACKING.
- SLIDE LUBRICATION: EXTREME PRESSURE HI-LOW TEMPERATURE POLYMER GREASE.
- FINISH: SLIDE CHANNELS AND BRACKETS ARE COMMERCIAL ZINC PLATE. TRAY IS POLYURETHANE BLACK POWDER COAT.
- MATERIAL: SLIDE CHANNELS, BRACKETS AND TRAY ARE COLD ROLLED STEEL.

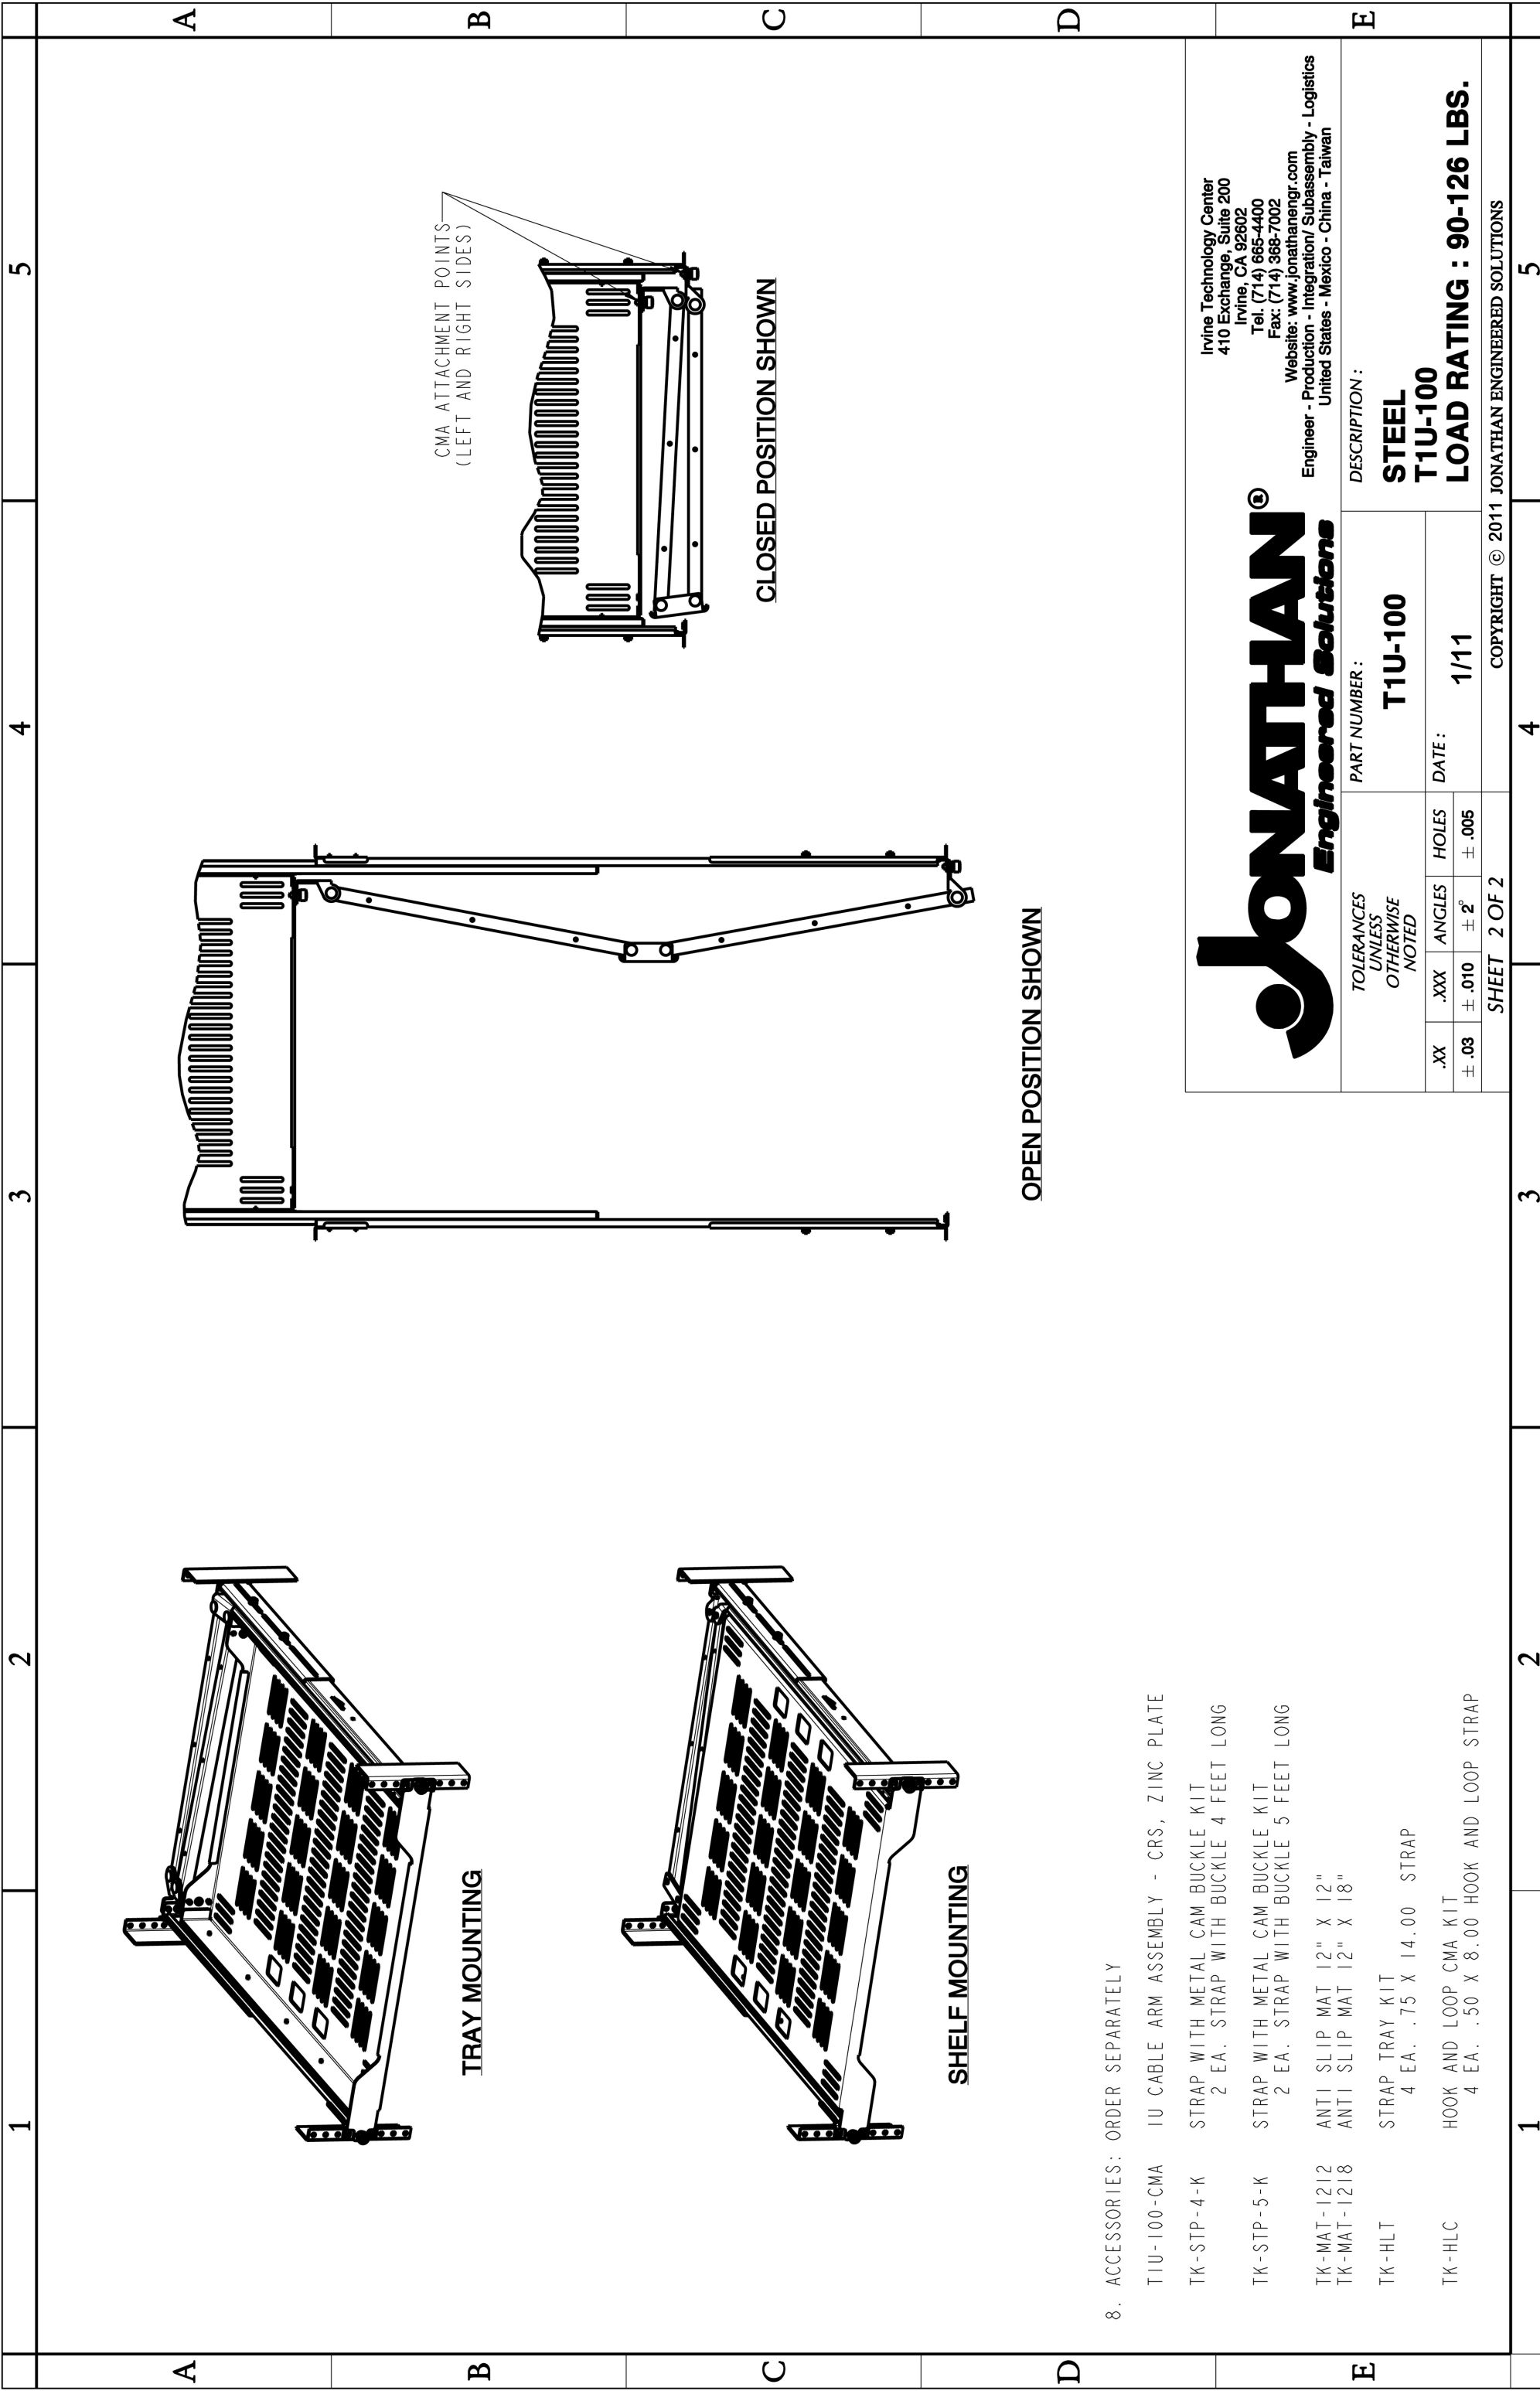

TRAY MOUNTING

SHELF MOUNTING

OPEN POSITION SHOWN

CLOSED POSITION SHOWN

CMA ATTACHMENT POINTS  
(LEFT AND RIGHT SIDES)

8. ACCESSORIES: ORDER SEPARATELY





- T1U-100-CMA IU CABLE ARM ASSEMBLY - CRS, ZINC PLATE
- TK-STP-4-K STRAP WITH METAL CAM BUCKLE KIT  
2 EA. STRAP WITH BUCKLE 4 FEET LONG
- TK-STP-5-K STRAP WITH METAL CAM BUCKLE KIT  
2 EA. STRAP WITH BUCKLE 5 FEET LONG
- TK-MAT-1212 ANTI SLIP MAT 12" X 12"
- TK-MAT-1218 ANTI SLIP MAT 12" X 18"
- TK-HLT STRAP TRAY KIT  
4 EA. .75 X 14.00 STRAP
- TK-HLC HOOK AND LOOP CMA KIT  
4 EA. .50 X 8.00 HOOK AND LOOP STRAP

Irvine Technology Center  
410 Exchange, Suite 200  
Irvine, CA 92602  
Tel: (714) 665-4400  
Fax: (714) 388-7002  
Website: [www.jonathanengr.com](http://www.jonathanengr.com)  
Engineer - Production - Integration/ Subassembly - Logistics  
United States - Mexico - China - Taiwan



TOLERANCES UNLESS OTHERWISE NOTED		PART NUMBER: <b>T1U-100</b>		DESCRIPTION: <b>STEEL T1U-100 LOAD RATING : 90-126 LBS.</b>	
.XX	.XXX	ANGLES	HOLES	DATE:	1/11
± .03	± .010	± 2°	± .005		
SHEET 2 OF 2					

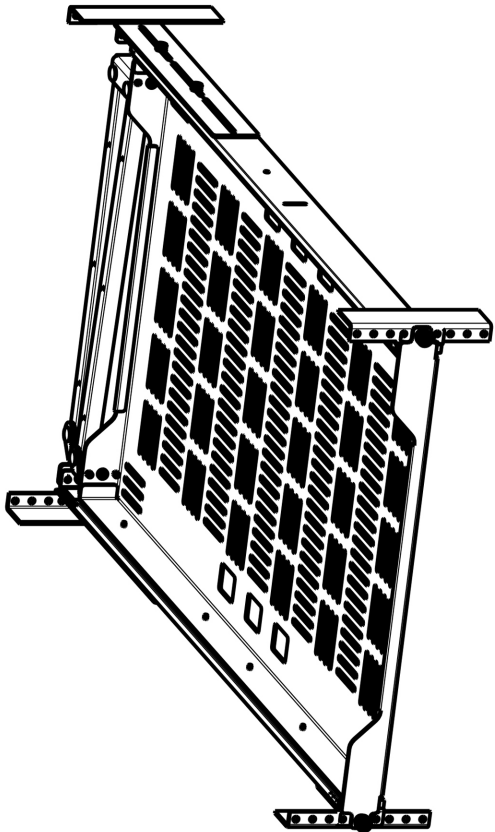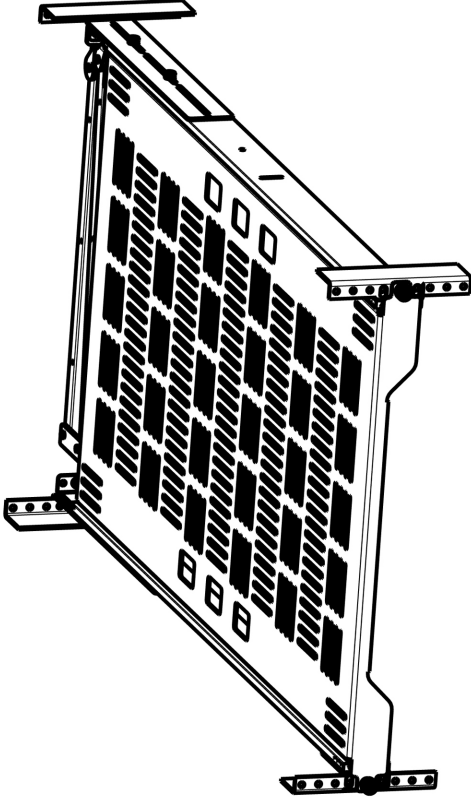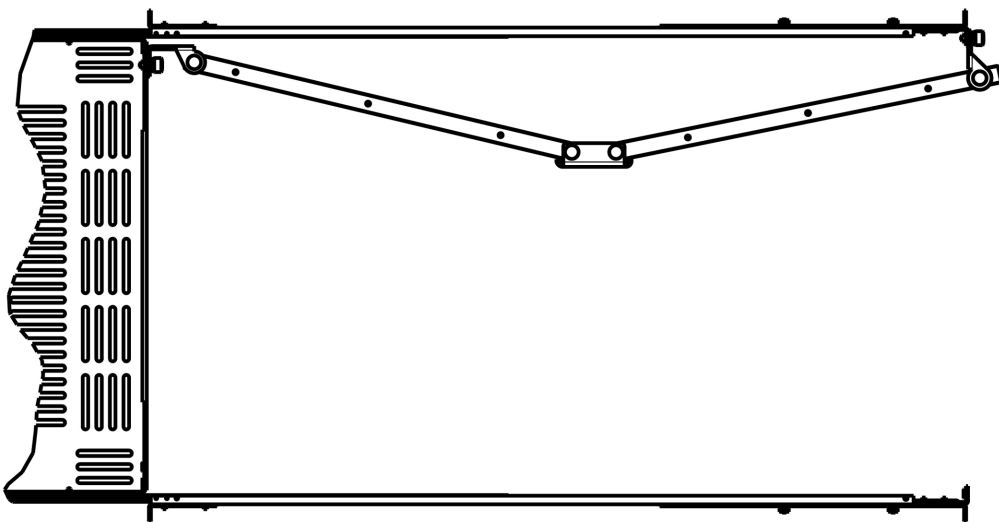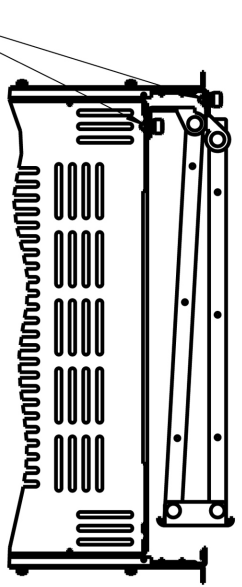







	1	2	3	4	5
A	 <p style="text-align: center;"><b>TRAY MOUNTING</b></p>				
B	 <p style="text-align: center;"><b>SHELF MOUNTING</b></p>				
C	 <p style="text-align: center;"><b>OPEN POSITION SHOWN</b></p>				
D	 <p style="text-align: center;"><b>CLOSED POSITION SHOWN</b></p> <p style="text-align: center;">CMA ATTACHMENT POINTS (LEFT AND RIGHT SIDES)</p>				
E	<p>6. ACCESSORIES: ORDER SEPARATELY</p> <p>TIU-200-CMA IU CABLE ARM ASSEMBLY - STAINLESS STEEL</p> <p>TK-STP-4-K STRAP WITH METAL CAM BUCKLE KIT 2 EA. STRAP WITH BUCKLE 4 FEET LONG</p> <p>TK-STP-5-K STRAP WITH METAL CAM BUCKLE KIT 2 EA. STRAP WITH BUCKLE 5 FEET LONG</p> <p>TK-MAT-1212 ANTI SLIP MAT 12" X 12"</p> <p>TK-MAT-1218 ANTI SLIP MAT 12" X 18"</p> <p>TK-HLT STRAP TRAY KIT 4 EA. .75 X 14.00 STRAP</p> <p>TK-HLC HOOK AND LOOP CMA KIT 4 EA. .50 X 8.00 HOOK AND LOOP STRAP</p>				
	1	2	3	4	5

**JONATHAN**  
*Engineered Solutions*





Irvine Technology Center  
410 Exchange, Suite 200  
Irvine, CA 92602  
Tel: (714) 665-4400  
Fax: (714) 388-7002  
Website: [www.jonathanengr.com](http://www.jonathanengr.com)  
Engineer - Production - Integration / Subassembly - Logistics  
United States - Mexico - China - Taiwan

TOLERANCES UNLESS OTHERWISE NOTED		PART NUMBER: <b>T1U-200</b>	
.XX	.XXX	ANGLES	HOLES
± .03	± .010	± 2°	± .005
DATE: <b>1/11</b>		DESCRIPTION: <b>ALUMINUM T1U-200 LOAD RATING : 86-123 LBS.</b>	
SHEET 2 OF 2			

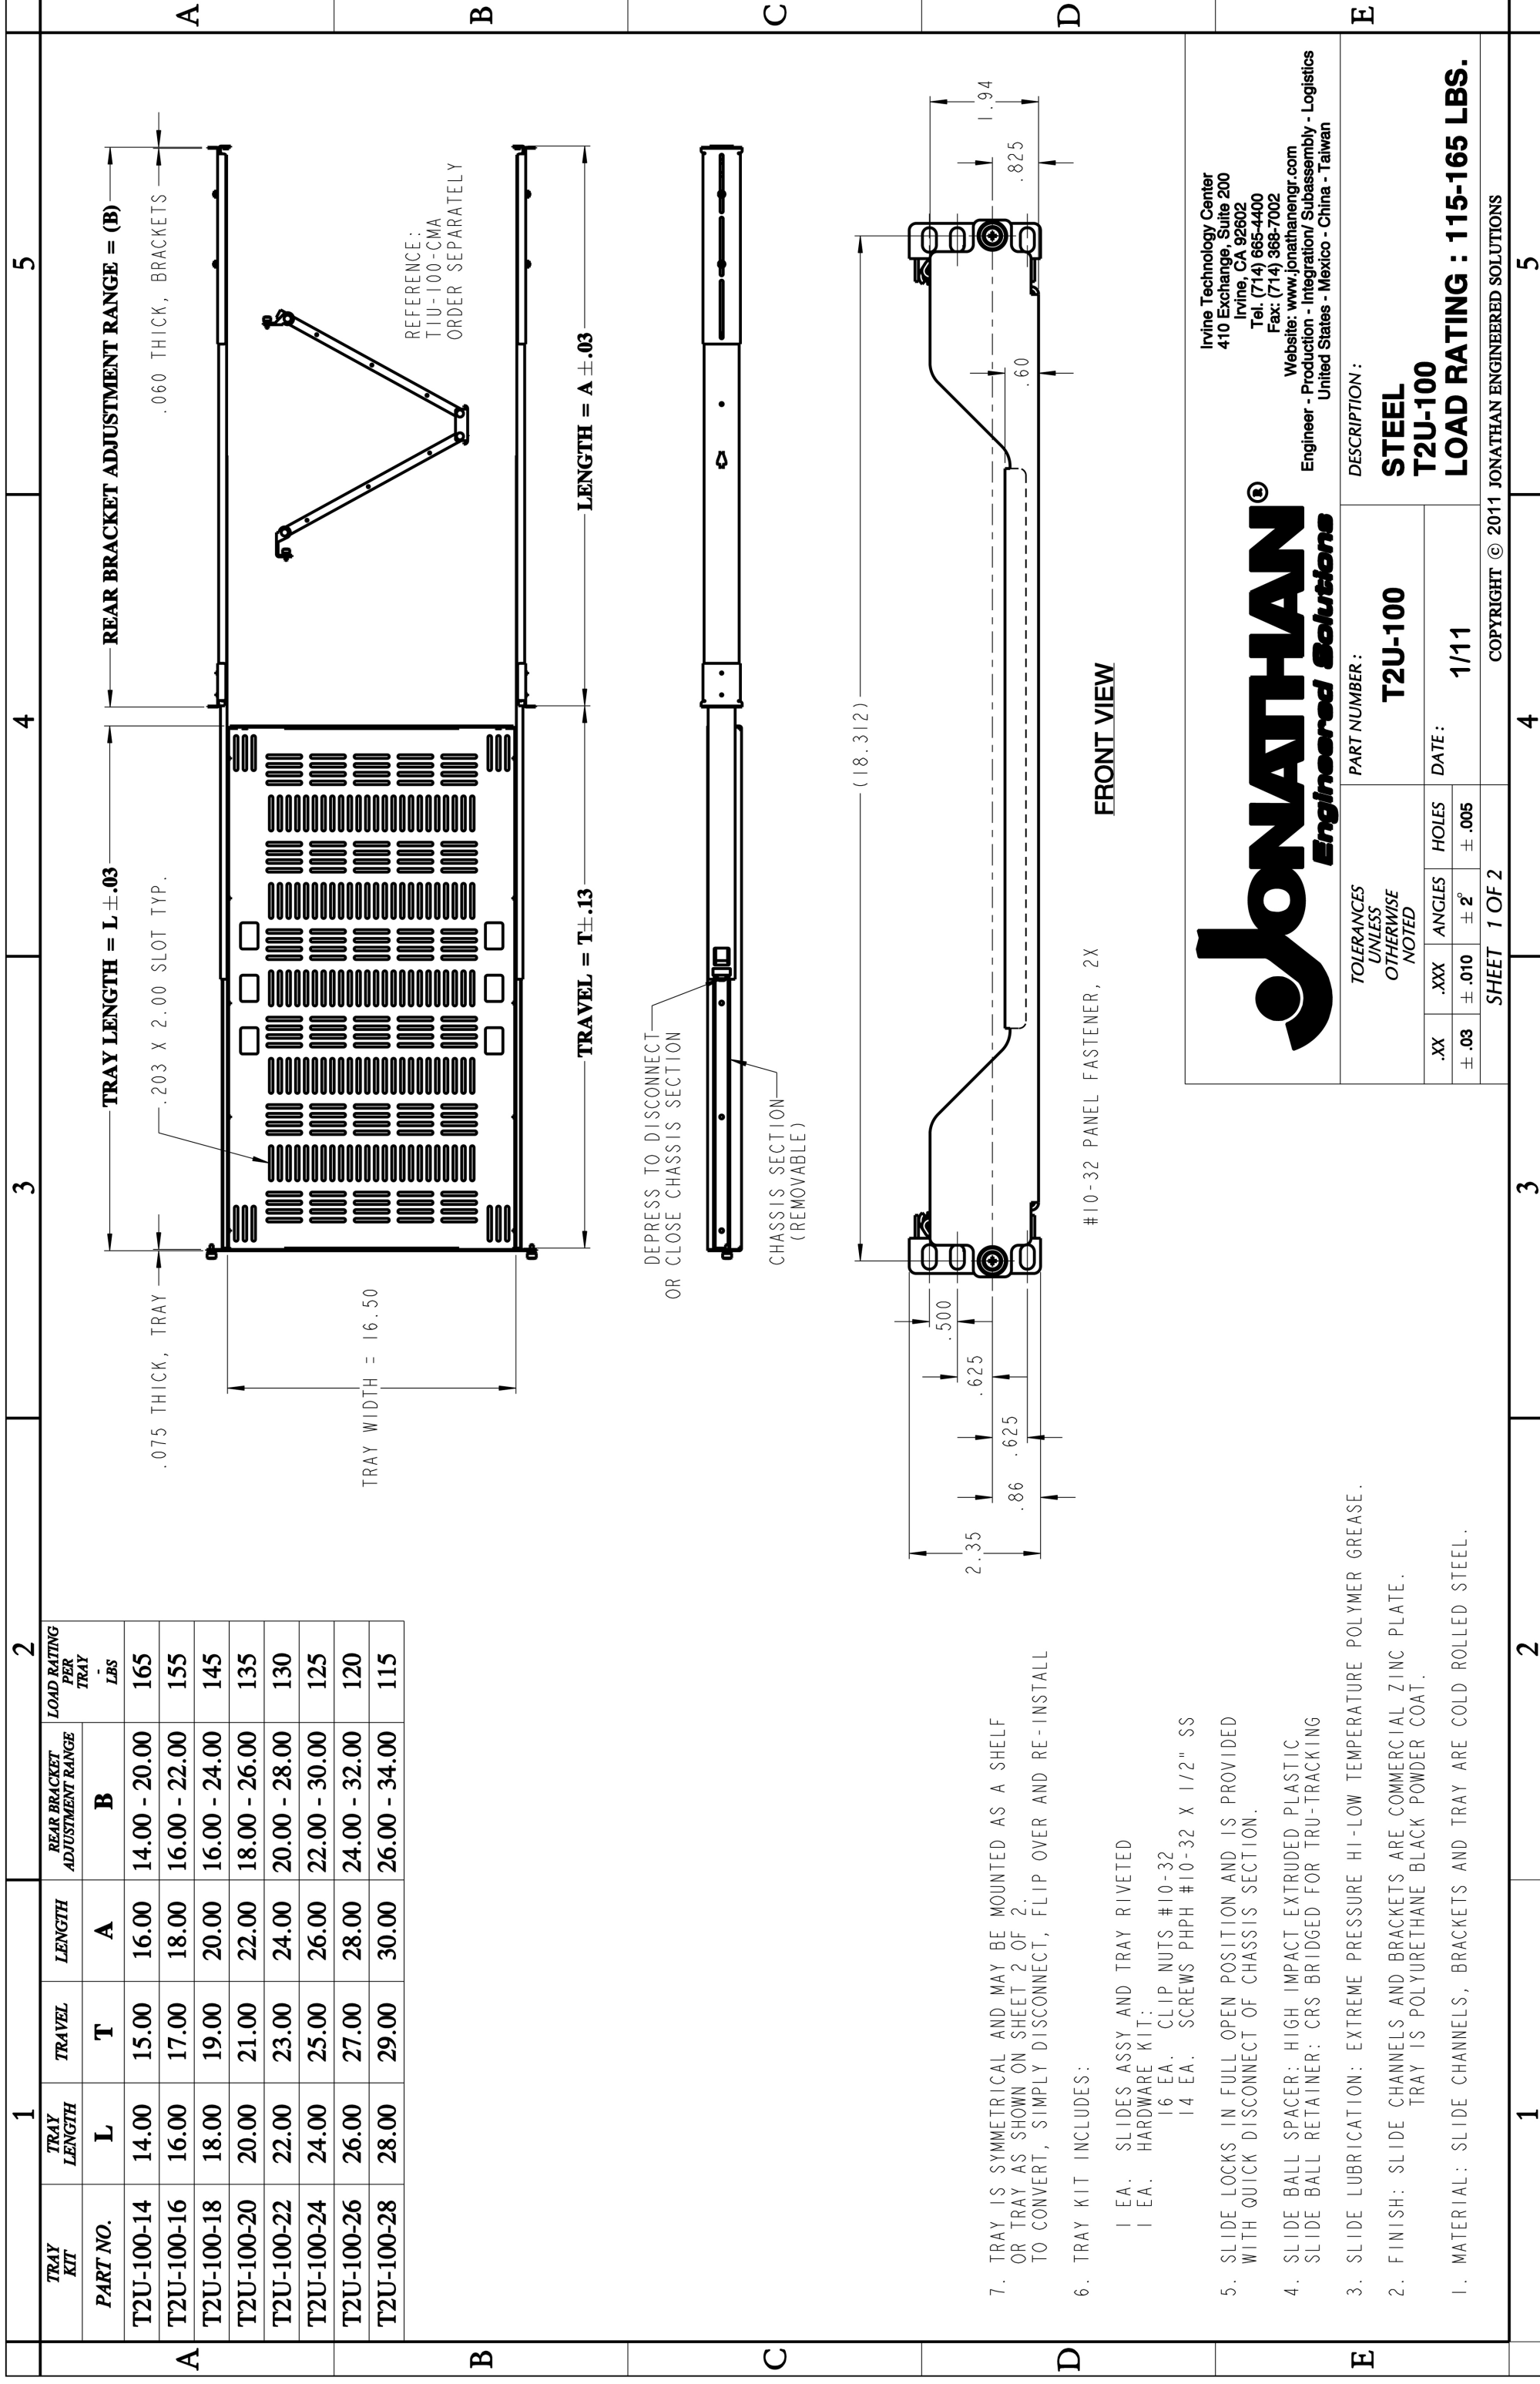

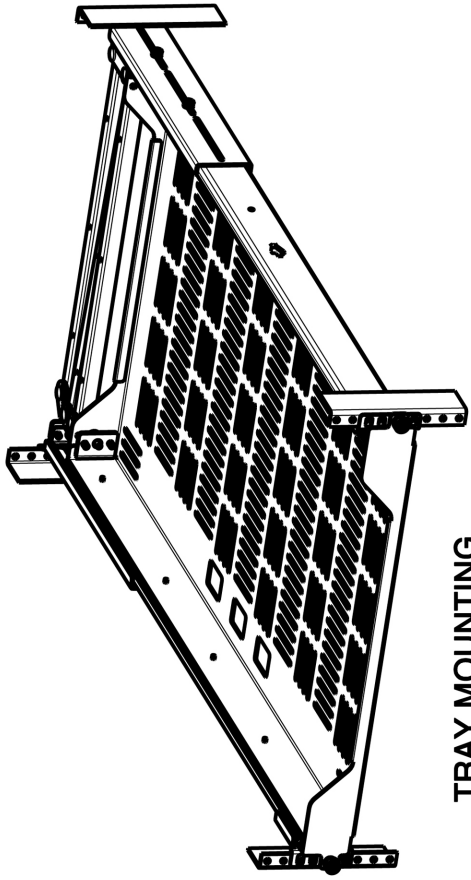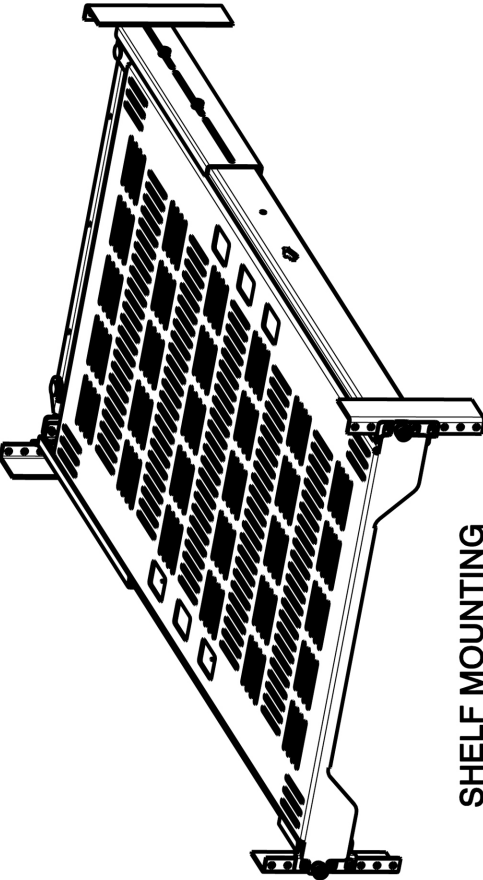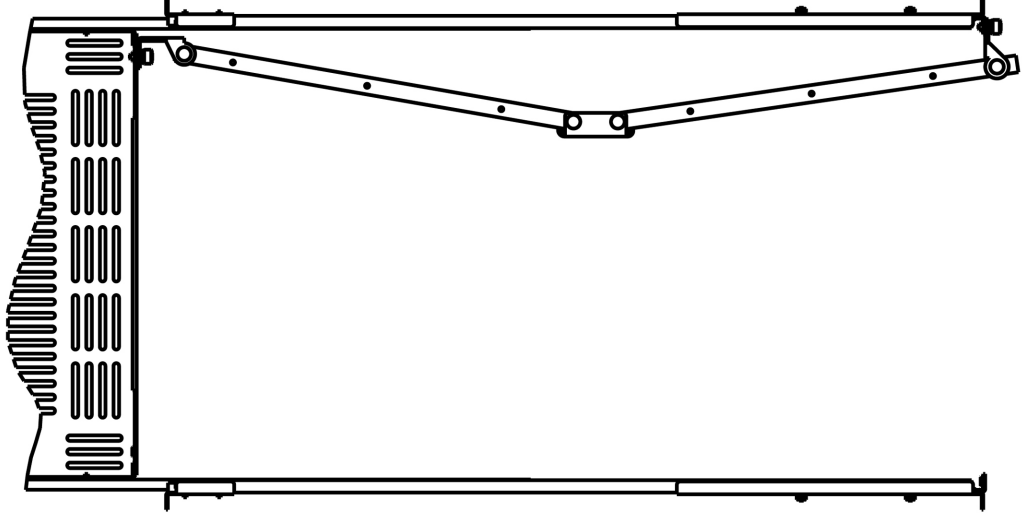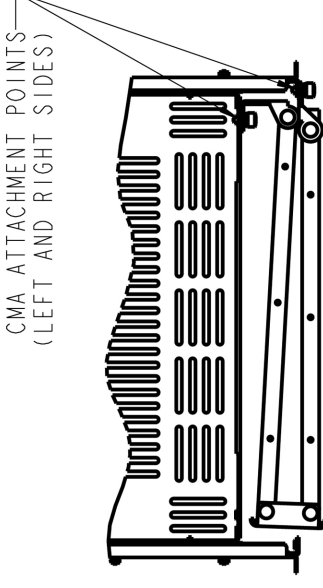A	1	2	3	4	5								
	 <p><b>TRAY MOUNTING</b></p>	 <p><b>SHELF MOUNTING</b></p>	 <p><b>OPEN POSITION SHOWN</b></p>	 <p><b>CLOSED POSITION SHOWN</b></p> <p>CMA ATTACHMENT POINTS (LEFT AND RIGHT SIDES)</p>									
B													
C													
D	<p>8. ACCESSORIES: ORDER SEPARATELY</p> <p>TIU-100-CMA IU CABLE ARM ASSEMBLY - CRS, ZINC PLATE</p> <p>TK-STP-4-K STRAP WITH METAL CAM BUCKLE KIT 2 EA. STRAP WITH BUCKLE 4 FEET LONG.</p> <p>TK-STP-5-K STRAP WITH METAL CAM BUCKLE KIT 2 EA. STRAP WITH BUCKLE 5 FEET LONG.</p> <p>TK-MAT-1212 ANTI SLIP MAT 12" X 12"</p> <p>TK-MAT-1218 ANTI SLIP MAT 12" X 18"</p> <p>TK-HLT STRAP TRAY KIT 4 EA. .75 X 14.00 STRAP</p> <p>TK-HLC HOOK AND LOOP CMA KIT 4 EA. .50 X 8.00 HOOK AND LOOP STRAP</p>												
E	 <p>Irvine Technology Center 410 Exchange, Suite 200 Irvine, CA 92602 Tel: (714) 665-4400 Fax: (714) 368-7002 Website: www.jonathanengr.com Engineer - Production - Integration/ Subassembly - Logistics United States - Mexico - China - Taiwan</p>	<p>TOLERANCES UNLESS OTHERWISE NOTED</p> <table border="1"> <tr> <td>.XX</td> <td>.XXX</td> <td>ANGLES</td> <td>HOLES</td> </tr> <tr> <td>± .03</td> <td>± .010</td> <td>± 2°</td> <td>± .005</td> </tr> </table>	.XX	.XXX	ANGLES	HOLES	± .03	± .010	± 2°	± .005	<p>DESCRIPTION:</p> <p><b>STEEL T2U-100</b></p> <p><b>LOAD RATING : 115-165 LBS.</b></p>	<p>PART NUMBER: <b>T2U-100</b></p> <p>DATE: <b>1/11</b></p>	<p>SHEET 2 OF 2</p>
.XX	.XXX	ANGLES	HOLES										
± .03	± .010	± 2°	± .005										
	1	2	3	4	5								

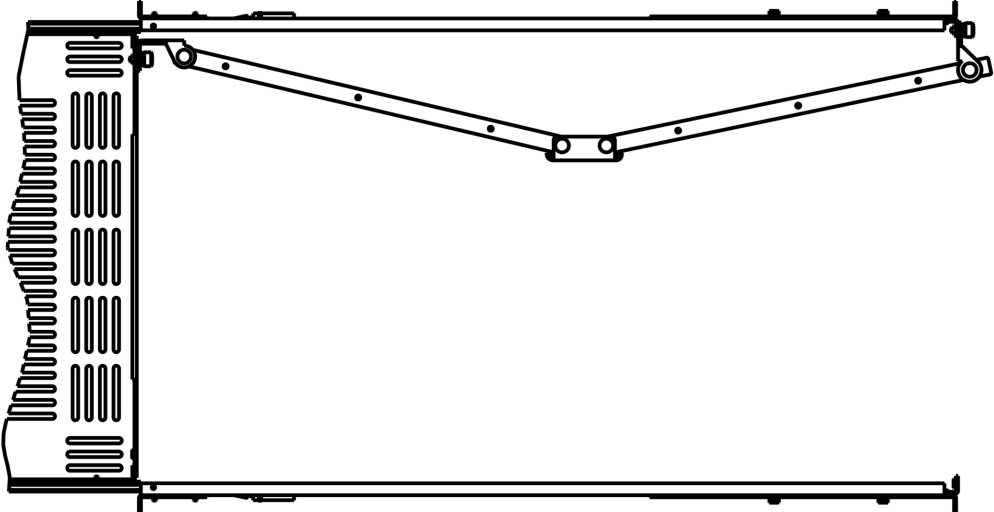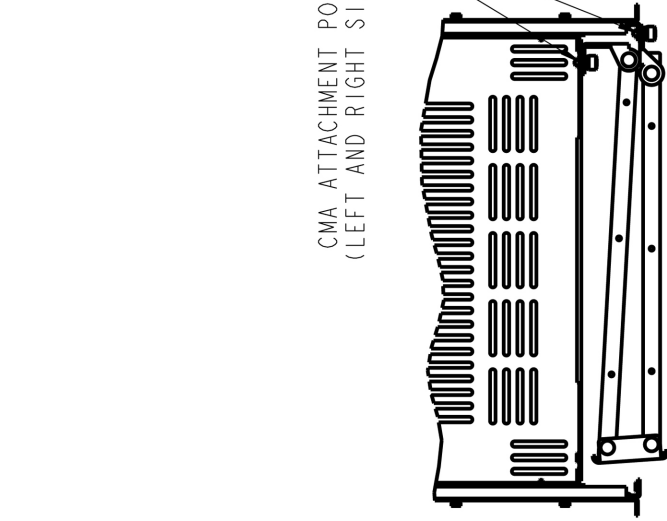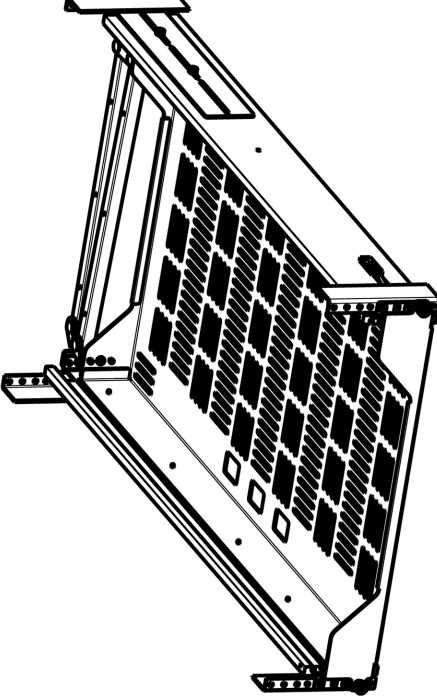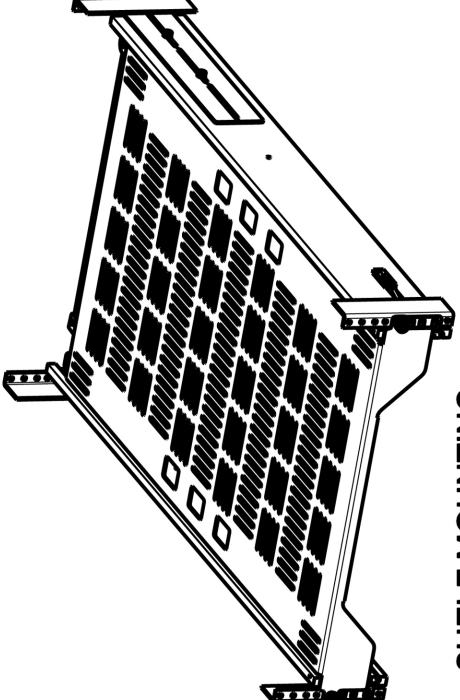

	1	2	3	4	5					
A	 <p style="text-align: center;"><b>OPEN POSITION SHOWN</b></p>									
B						 <p style="text-align: center;"><b>CLOSED POSITION SHOWN</b></p> <p style="text-align: center;">CMA ATTACHMENT POINTS (LEFT AND RIGHT SIDES)</p>				
C						 <p style="text-align: center;"><b>TRAY MOUNTING</b></p>				
D						 <p style="text-align: center;"><b>SHELF MOUNTING</b></p>				
E						<p>6. ACCESSORIES: ORDER SEPARATELY</p> <p>TIU-200-CMA IU CABLE ARM ASSEMBLY - STAINLESS STEEL</p> <p>TK-STP-4-K STRAP WITH METAL CAM BUCKLE KIT 2 EA. STRAP WITH BUCKLE 4 FEET LONG.</p> <p>TK-STP-5-K STRAP WITH METAL CAM BUCKLE KIT 2 EA. STRAP WITH BUCKLE 5 FEET LONG.</p> <p>TK-MAT-1212 ANTI SLIP MAT 12" X 12"</p> <p>TK-MAT-1218 ANTI SLIP MAT 12" X 18"</p> <p>TK-HLT STRAP TRAY KIT 4 EA. .75 X 14.00 STRAP</p> <p>TK-HLC HOOK AND LOOP CMA KIT 4 EA. .50 X 8.00 HOOK AND LOOP STRAP</p>				
	A	B	C	D	E					

**JONATHAN<sup>®</sup>**  
*Engineered Solutions*

Irvine Technology Center  
410 Exchange, Suite 200  
Irvine, CA 92602  
Tel: (714) 665-4400  
Fax: (714) 388-7002  
Website: [www.jonathanengr.com](http://www.jonathanengr.com)  
Engineer - Production - Integration / Subassembly - Logistics  
United States - Mexico - China - Taiwan

TOLERANCES UNLESS OTHERWISE NOTED		PART NUMBER: <b>T2U-200</b>		DESCRIPTION: <b>ALUMINUM T2U-200 LOAD RATING : 144-254 LBS.</b>	
.XX	.XXX	ANGLES	HOLES	DATE:	1/11
± .03	± .010	± 2°	± .005	SHEET 2 OF 2	