HOFFMAN Easy Swap ADAPTOR PLENUMS


A BOLT-ON UPGRADE SOLUTION FROM OLDER A/C UNITS TO A NEW SPECTRACOOL AIR CONDITIONER

When existing air conditioners are damaged or have reached end-of-life, nVent HOFFMAN Easy Swap Adaptor Plenums provide a quick and easy means for attaching a state-of-the-art HOFFMAN SpectraCool air conditioner to the existing enclosure cut-out with no further modifications needed. Upgrade to the latest in maintenance-friendly cooling technology with filterless operation, active condensate management, and optional network connectivity in a fraction of the time and expense of retrofitting.


Download the Easy Swap app to your mobile device to easily identify your replacement air conditioner

FEATURES

- Upgrade easily to a high-efficiency HOFFMAN SpectraCool solution from older McLean Genesis units and A/C models from other manufacturers
- No modification of the enclosure required Easy Swap Adaptor Plenums are engineered to match the cut-out of the air conditioner being replaced
- Plenum design allows for optimum air flow versus a flat plate that can block the air intake and air outtake left by the older air conditioner
- Consolidate A/C models and parts; save by reducing inventories and suppliers
- Eliminate downtime required to modify or cut existing cut-outs for unit upgrades
- Local availability
- $\bullet \ \mathsf{Responsive} \ \mathsf{aftermarket} \ \mathsf{service}$
- Rated NEMA 12, IP54

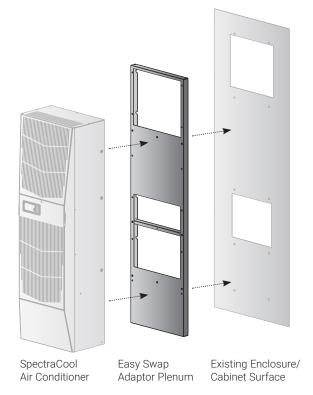

Easy Swap Adaptor Plenums





North America

 Minneapolis, MN
 Tel: +1.763.421.2240

 Mexico City, Mexico
 Tel: +52.55.5280.1449

 Toronto, Canada
 Tel: +1.416.289.2770

South America

 Sao Paulo, Brazil
 Tel: +55.11.5184.2100

 Boitura, Brazil
 Tel: +55.15.3363.9148

Middle East & India

 Dubai, United Arab Emirates
 Tel: +971.4.378.1700

 Bangalore, India
 Tel: +91.80.6715.2001

Europe

 Betschdorf, France
 Tel: +33.3.88.90.64.90

 Straubenhardt, Germany
 Tel: +49.7082.794.0

 Dzierzoniow, Poland
 Tel: +48.74.64.63.900

 Lainate, Italy
 Tel: +39.02.932.7141

Asia

 Shanghai, P.R. China
 Tel: +86.21.2412.6943

 Singapore
 Tel: +65.6768.5800

 Shin-Yokohama, Japan
 Tel: +81.45.476.0271

 Seoul, Korea
 Tel: +82.2.2129.7755

 Qingdao
 Tel: +86.532.8771.6101

FOR MORE INFORMATION AND TO CONTACT US, GO TO: NVENT.COM/HOFFMAN

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER



CONNECT AND PROTECT

SpectraCool Air Conditioners





HOFFMAN SpectraCool

INDOOR/OUTDOOR AIR CONDITIONERS

ENERGY-EFFICIENT, FILTERLESS AIR CONDITIONERS NOW AVAILABLE WITH ETHERNET/IP

HOFFMAN SpectraCool Air Conditioners deliver reliable enclosure cooling in demanding environments, including industrial automation, telecommunications, waste water treatment, material handling, security and defense systems, and more. SpectraCool Air Conditioners feature a new, filterless design that reduces clogging, which can lead to costly and time-consuming system failures. With its energy-efficient compressor and new earthfriendly refrigerant, SpectraCool Air Conditioners are available in three configurations that offer a broad range of cooling capacities, power input, and mounting options for your most critical enclosure cooling applications.



STANDARD SERIES

4.000 - 20.000 BTUs/Hr

HOFFMAN SPECTRACOOL SERIES FEATURES

- A wide range of cooling capacities for indoor, outdoor, and harsh
- Available in standard, narrow and compact models
- Energy-efficient compressors that deliver up to 23 percent greater energy efficiency
- Quiet 68 dB operation
- Wide outdoor operating temperatures: -40 F/-40 C to 131 F/55 C
- Dust-resistant coil design supports filterless operation in most environments
- 115, 230 or 400/460 3-phase VAC power input options with terminal block power connection for easy installation
- Integrated active condensate evaporator with heater strip
- Thermal expansion valve controls refrigerant flow according to load changes on the evaporator
- Clean, aesthetic design adds value to system appearance
- R134a and R407c earth-friendly refrigerant
- Telcordia GR-487 capable
- Built-in easy-mount flanges for simple installation
- HOFFMAN Easy Swap Adaptor Plenums available for easy replacement of older air conditioners without modifying cut-out
- Optional HOFFMAN SpectraCool Remote Access Control option for PC monitoring and control of multiple SpectraCool units





- A Rugged, all-metal shroud for demanding factory and outdoor environments
- B Easy-to-access metal filter removes for
- c Dual condenser-side impellers for erformance redundancy (G52, G57 and N43 models only)
- R134a and R407c compressor provides greater energy efficiency and environmental friendliness
- UL Listed, saving customers time and noney by having agency approvals
- F Narrow bevel design with works with wall mount enclosures and accommodates 12-in. (300 mm) deep
- G QR Code links directly to service

NARROW SERIES Indoor/Outdoor 4.000 - 11.000 BTUs/Hr

HOFFMAN SPECTRACOOL

STANDARD INDOOR/OUTDOOR SERIES





Watts

8,000 & 12,000 BTUs/Hr 1,172 & 1,758 Watts 2,300 & 3,500



20,000 BTUs/Hr

STANDARD SIZE UNITS OFFERING THE MOST **COOLING CAPACITY WITH GREATER ENERGY EFFICIENCY**

SpectraCool Standard Series Air Conditioners are designed for robust cooling performance in demanding indoor and harsh outdoor environments. Rotary compressors provide more energy efficiency than reciprocating compressors, and allow quick re-start under pressure without causing damage. Dual impellers on G52 and G57 units pull air into the front of the unit and direct the air upwards in a 90-degree angle for the most direct air path while providing redundancy.

FEATURES


G28 Indoor/

4,000 & 6,000

Outdoor

BTUs/Hr

- 4,000 to 20,000 BTUs/Hr of cooling
- Lightweight design; 30 lb. (14 kg)
- · Indoor and outdoor models
- Dust-and corrosion-resistant components for trouble-free operation in the most demanding environments



Air Flow : Air Flow

HOFFMAN SPECTRACOOL NARROW

INDOOR/OUTDOOR SERIES




THE LOW-PROFILE AIR CONDITIONER THAT OFFERS HIGH LEVELS OF COOLING PERFORMANCE

Engineered with the same features of the Standard Series, SpectraCool Narrow Air Conditioners provide a space-saving cooling solution to fit shallow-depth enclosures. Low-profile Narrow models are designed to fit on 12-in. (300 mm) deep floor- and wall-mount enclosures, facilitating essential cooling for critical electronics in a wider range of indoor and outdoor enclosure, and cabinet applications.

FEATURES

- · Higher capacity with a smaller footprint: 11.5-in. (291 mm) width
- 28, 36 and 43-in. units provide 4,000 to 11,000 BTUs/Hr of cooling
- Centrally mounted thermostat avoids interference with back panels
- Beveled design works with wall-mount enclosures for maximum efficiency in applications with limited airflow



HOFFMAN SPECTRACOOL COMPACT

INDOOR SERIES

Enable Comm

HOFFMAN SPECTRACOOL

REMOTE ACCESS CONTROL

REMOTE COOLING MANAGEMENT SOLUTION **VIA USB OR ETHERNET USING SNMP OR** EtherNet/IP

A COMPACT COOLING SOLUTION FOR **ISOLATED COOLING DEMANDS COOLING SYSTEM-WIDE FROM YOUR PC**

N17 Compact Indoor

Additional height

for 460 VAC units

Designed to fit smaller enclosures for Type 12 indoor cooling applications, SpectraCool Compact Series Air Conditioners offer vital cooling in a reduced footprint. SpectraCool Compact models also feature a built-in active condensate evaporator and a power-off relay for a door switch to prevent condensation from dripping on the floor and in the enclosure.

FEATURES

• 1,000 to 2,000 BTUs/Hr of cooling

N17 Compact Indoor

293 and 585 Watts

1,000 and 2,000 BTUs/Hr

- 17-in. tall x 12-in. wide footprint fits shallow-depth enclosures
- Available in 115, 230 and 460 1-phase VAC power inputs
- Terminal block power connection for easy installation

MONITOR AND MANAGE THE HEALTH OF

HOFFMAN SpectraCool Remote Access Control is a parametric controller designed for monitoring and management of an entire network of SpectraCool air conditioners. Available as a factory-installed option integrated with select SpectraCool models, Remote Access Control offers communications capabilities to interface with, monitor, and control the operation of the units remotely from your personal computer via USB using Modbus, or Ethernet using SNMP or EtherNet/IP.

FEATURES

- Direct pushbutton control and display indication of program variables, temperature, and enabled functions including cooling, heating, alarms, compressor, ambient fan, and controller
- Integrated 3-digit alphanumeric display provides status codes and at-a-glace display of cabinet temperature
- Pre-programmed with heating and cooling setpoints that are easily adjusted to changing needs
- Seven non-latching alarm conditions including door open, smoke detection, high pressure, air inlet and outlet temperature sensors, low temperature, high temperature, and frost
- Free PC interface tool software assigns a unique IP address to each SpectraCool unit equipped with Remote Access Control, allowing system-wide management of multiple units

nVent.com/HOFFMAN | 2 nVent.com/HOFFMAN | 3 nVent.com/HOFFMAN | 4